




FORUM

Wire Rope Hoists

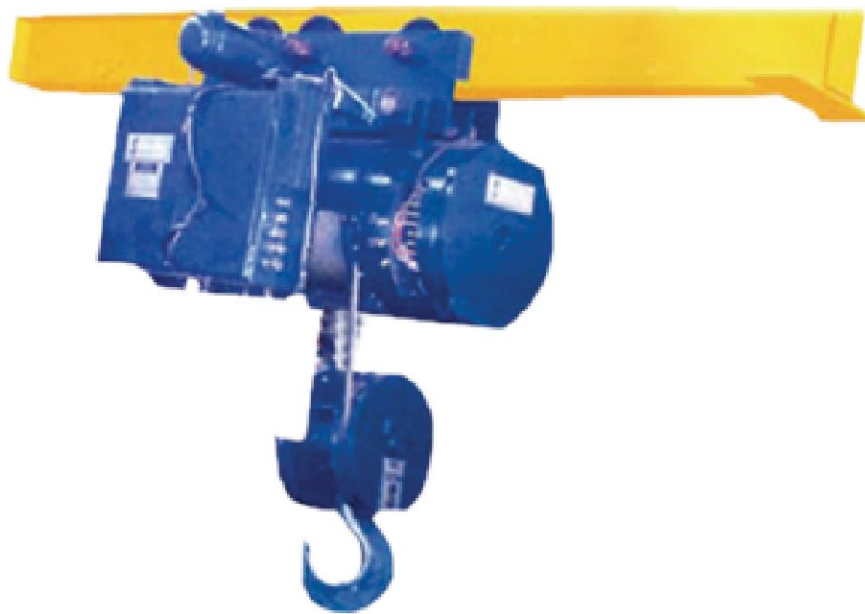

Power
to move loads

Swiftly &

Smartly

Iom.appr.ad Tones	Height of left ()	Hoisting Speed m/min	Motor HP (appr.)	Hoist Model Wire rope dia mm	No. of falls of rope	Hoist with Trolley								Fixed Mounted Hoist									
						Head room H mm	Fig. No.	L mm	A mm	B mm	C mm	D mm	Weight Incl Counter wt. in kgzsq	curvature in mitrs.	Head Room H mm	Fig. No.	L mm	A mm	B mm	C mm	Mounting Hole dia. mm	Weight in Kgs.	
1	2.75	2.75	1	hh-14	6 4	850	III	635	400	545	250	250	200	3	900	III	720	408	515	260	18	135	
	2.75	2.75	1	HH-24SH	6 4	400	IV	635	400	545	250	250	200	4									
	5	2.75	1	HH-24	6 4	850	III	680	400	545	250	250	240	3	900	III	720	408	515	260	18	145	
	5	2.75	1	HH-24SH	6 4	400	IV	680	400	545	250	250	240	4									
	7.5	10	3	221-42	8 2	800	II	675	195	145	250	250	160	3	750	II	675	380	340	260	18	140	
	7.5	10	3	221-42SH	8 2	400	IV	755	395	590	250	250	295	4									
	12	10	3	221-52SH	8 2	800	II	790	195	145	250	250	180	3	750	II	790	495	340	260	18	150	
1.50	5	6.67	3	221-43	8 3	950	III	675	370	545	250	250	295	3	925	III	675	380	340	260	18	150	
	8	6.67	3	221-53	8 3	950	III	790	370	545	250	250	315	3	925	III	790	495	340	260	18	160	
	20	14	6.5	223-11	13 1	850	I	965	385	655	250	450	590	18	950	I	965	530	500	310	25	385	
	31	14	6.5	223-21	13 1	850	I	1125	385	655	250	450	620	18	950	I	1125	690	500	310	25	425	
2	3.75	5	3	221-44	8 4	900	III	675	400	545	250	250	300	3	900	III	675	380	515	260	18	165	
	3.75	5	3	221-44SH	8 4	400	V	780	425	590	250	250	350	6									
	6	5	3	221-54	8 4	900	III	790	400	545	250	250	320	3	900	III	790	495	515	260	18	165	
	6	5	3	221-54SH	8 4	400	V	790	425	590	250	250	380	6									
2.50	26.5	10	8	225-11	16 1	1250	I	1150	485	640	250	450	750	10	1145	I	1165	710	580	400	35	650	
	43	10	8	225-21	16 1	1250	I	1410	485	640	250	450	860	12	1145	I	1420	966	580	400	35	770	
	73	20	15	228-11	16 1	1250	I	1870	485	640	250	450	1080	20	1145	I	1870	1415	580	400	35	890	
3	10	7	6.5	223-12	13 2	1050	II	965	250	210	250	450	525	6	1015	I	965	530	500	310	25	400	
	10	7	6.5	223-12SH	13 2	600	V	965	530	785	250	450	710	18	1015	I	965	530	500	310	25	400	
	15.5	7	6.5	223-22	13 2	1050	II	1125	250	210	250	450	575	6	1015	II	1125	690	500	310	25	440	
	15.5	7	6.5	223-22SH	13 2	600	V	1125	530	785	250	450	775	18									
5	6.67	4.67	6.5	223-13SH	13 3	1450	V	965	510	800	250	450	760	4	1450	III	965	530	815	310	25	460	
	10.3	4.67	6.5	223-13SH	13 3	1450	V	1125	510	800	250	450	830	4	1450	III	1125	690	815	310	25	500	
	13.25	5	8	225-12	16 2	1450	II	1165	295	285	250	450	840	12	1300	II	1165	710	580	400	35	665	
	13.25	5	8	225-12SH	16 2	750	V	1150	670	805	250	450	950	12									
	21.5	5	8	225-22	16 2	1500	II	1410	295	285	250	450	950	12	1300	II	1410	966	580	400	35	785	
	21.5	5	8	221-22SH	16 2	750	V	1410	640	805	250	450	1410	20									
	36.5	10	15	228-12	16 2	1500	II	1870	295	285	250	450	1170	20	1300	II	1870	1415	580	400	35	785	

